


ORNL
MASTER COPY

ORNL-3544 *ScJ*
UC-4 - Chemistry
TID-4500 (25th ed.)

REDUCTION OF URANIUM HEXAFLUORIDE
RETENTION ON BEDS OF MAGNESIUM
FLUORIDE USED FOR REMOVAL OF
TECHNETIUM HEXAFLUORIDE

Sidney Katz

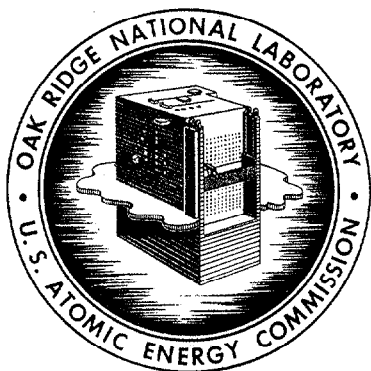

OAK RIDGE NATIONAL LABORATORY

operated by

UNION CARBIDE CORPORATION

for the

U.S. ATOMIC ENERGY COMMISSION

ORNL- 3544

Contract No. W-7405-eng-26
CHEMICAL TECHNOLOGY DIVISION
Chemical Development Section B

REDUCTION OF URANIUM HEXAFLUORIDE RETENTION ON BEDS OF
MAGNESIUM FLUORIDE USED FOR REMOVAL OF TECHNETIUM
HEXAFLUORIDE

Sidney Katz

DATE ISSUED


JAN 17 1964

OAK RIDGE NATIONAL LABORATORY
Oak Ridge, Tennessee
operated by
UNION CARBIDE CORPORATION
for the
U.S. ATOMIC ENERGY COMMISSION



CONTENTS

	<u>Page</u>
Abstract	1
Introduction	1
Materials	2
Experimental Work	3
Test 1: Deleterious Effect of Grossly Inadequate Pretreatment of Magnesium Fluoride Pellets	3
Test 2: Favorable Effect of Extensive Pretreatment of Magnesium Fluoride Pellets	5
Test 3: Importance of the Prefluorination Step in the Pretreatment of Magnesium Fluoride Pellets	6
Test 4: Desorption of Uranium Hexafluoride from Well-Stabilized Magnesium Fluoride	6
Test 5: Lack of Effect of Hydrogen Fluoride on Well-Stabilized Magnesium Fluoride Pellets	7
Discussion	8
References	9



REDUCTION OF URANIUM HEXAFLUORIDE RETENTION ON BEDS OF
MAGNESIUM FLUORIDE USED FOR REMOVAL OF TECHNETIUM
HEXAFLUORIDE

Sidney Katz

ABSTRACT

The excessive loss of uranium incurred when discarding magnesium fluoride, (the adsorber used to selectively remove technetium hexafluoride from uranium hexafluoride streams) is a problem common to all volatility processes for recovering enriched uranium fuels. As a result of the work described, two schemes for the release of the uranium hexafluoride from the magnesium fluoride and its separation from the technetium hexafluoride are proposed. One scheme depends on preferential thermal desorption of the uranium hexafluoride at 350°C and the other on selective adsorption of the uranium hexafluoride on sodium fluoride pellets following the codesorption of the two hexafluorides with fluorine at 500°C from the magnesium fluoride pellets. These proposals are aimed at reducing the amount of retained uranium to less than 1 g per 1000 g of discardable magnesium fluoride.

In the work reported here, the deposition of uranium on magnesium fluoride as a function of heating, fluorination, and hydrogen fluoride pretreatment of the magnesium fluoride pellets prior to exposure to uranium hexafluoride was characterized in a series of gasometric studies. The dependence of the quantity of uranium hexafluoride adsorbed on pressure and temperature was also determined.

The data show that physical adsorption is the mechanism for the deposition of most of the uranium hexafluoride on well-stabilized magnesium fluoride pellets. More than 90% of the adsorbate can be removed by heating to 350°C. Chemisorption (formation of a double salt) is probably not involved because of the small (<0.05) mole ratio of UF_6/MgF_2 observed.

INTRODUCTION

This report describes a gasometric study of the mechanisms of the undesirable deposition of uranium hexafluoride on magnesium fluoride and suggests two methods to reduce to acceptable amounts the uranium loss on the discarded magnesium fluoride.

The codeposition of uranium on magnesium fluoride beds that are used to selectively remove technetium hexafluoride from uranium hexafluoride streams is a problem common to all volatility processes for recovering enriched uranium from spent fuel elements. The magnitude of this codeposition is indicated from the experience in the Oak Ridge National Laboratory (ORNL) Volatility Pilot Plant,¹ in which 14 g of uranium was deposited on 1000 g of magnesium fluoride out of the 600 g of uranium passed through the bed as uranium hexafluoride. The extent of codeposition was somewhat less in a large-scale operation at the Paducah Gaseous Diffusion Plant,² where massive quantities of uranium hexafluoride are passed through magnesium fluoride beds; 3.25 kg of uranium was recovered from 500 kg of the used magnesium fluoride.

In the previous application of magnesium fluoride beds for the separation of technetium from uranium hexafluoride at the Paducah Gaseous Diffusion Plant, the codeposition of uranium on the bed was of small concern because (1) the uranium was of low isotopic enrichment and represented only a small fraction of that which passed through the bed, and (2) the technetium recovery process also provided economical uranium recovery. However, in the ORNL volatility application, the isotopic enrichment is high; the fraction of the throughput codeposited is greater; and the reprocessing costs are higher because of the fission product activity involved. Since in volatility applications, it is desirable to merely discard the used magnesium fluoride, the uranium that accompanies it must be held to an economic maximum (less than 1 g of uranium per 1000 g of magnesium fluoride).

In the work reported here, the quantity and form of uranium deposited was studied as a function of a variety of pretreatments of the magnesium fluoride pellets. The pressure and temperature dependence of the amount of adsorbed uranium hexafluoride was also observed. The data showed that the uranium hexafluoride is physically adsorbed when well-stabilized magnesium fluoride is used. Also, the uranium hexafluoride can be desorbed to such an extent that the used magnesium fluoride can be economically discarded.

MATERIALS

Magnesium Fluoride Pellets

The "as-received" pellets, taken from the same batch used in the ORNL Volatility Pilot Plant, contained 10.7% water. They had been manufactured at the Paducah Gaseous Diffusion Plant to meet the requirements of their technetium trapping program.² Similar pellets were reported to have a surface area of 111 m²/g after heating and purging with fluorine.²

In a preliminary examination of the pellets, the weight loss and surface area were determined for a number of possible pretreatments. The effect of heating the pellets for half an hour was tested at four temperatures until only 0.07% water remained. The data follows:

<u>Temperature (°C)</u>	<u>Cumulative Wt Loss (%)</u>	<u>Surface Area (m²/g)</u>
160	10.0	102
260	13.2	80
360	16.6	35
460	17.5	20

From the original water content (10.7%) and the cumulative weight loss (17.5%), a calculation indicates that 52.3% of the water was converted to hydrogen fluoride during the heat treatment.

The effect of a combination of heating at 160°C for a half hour followed by treating with fluorine at atmospheric pressure for 2 hr at 100°C resulted in a cumulative weight loss of 11.1% and a surface area of 89 m²/g.

These data permit an estimate of the physical and chemical properties of the magnesium fluoride pellets as used in the tests that follow.

EXPERIMENTAL WORK

A gasometric system³ was used in a series of five tests to determine (1) if inadequate pretreatment of the magnesium fluoride could result in gasometrically measurable adsorption of uranium hexafluoride, (2) how much uranium hexafluoride would be adsorbed on well-stabilized magnesium fluoride, (3) the importance of the fluorination step in the pretreatment of magnesium fluoride, (4) the temperature dependence of the desorption of uranium hexafluoride from magnesium fluoride, and (5) whether hydrogen fluoride pretreatment of the magnesium fluoride influenced subsequent uranium hexafluoride adsorption.

In each of the tests, after some specific pretreatment of the magnesium fluoride pellets, a gasometric measurement of uranium hexafluoride adsorption was made under the following conditions: 200 mm Hg pressure of uranium hexafluoride with the magnesium fluoride pellets at 100°C (deviations from these conditions are noted in specific cases). After the adsorption, the chemical form of the retained uranium was determined by chemical analysis and by gas evolution methods. The definitive chemical makeup of the magnesium fluoride pellet, itself, was deduced from chemical analysis and gasometric measurements.

The data are presented with the description of each of the five tests and are summarized in Table 1.

Test 1: Deleterious Effect of Grossly Inadequate Pretreatment of Magnesium Fluoride Pellets

Part A: Pretreatment by Heating at 150°C

The conditions and observations are listed below:

Table 1. Adsorption of Uranium Hexafluoride on Magnesium Fluoride: Effects of Various Pretreatments

Test	Magnesium Fluoride Pellets				Uranium Hexafluoride Retained (millimoles)		Magnesium Fluoride Pellet Residue				
	Wt (g)	Pretreatment			Gasometric ^b	Anal. ^c	Wt % Uranium		Final Wt (g)	N ₂ Surface Area (m ² /g)	
		Heat	F ₂	HF ^a			Total	U(VI)			
1A	0.631	150°C 2 hr	No	No	<0.1	125 to 25°C					
1B		No	No	Yes	0.7	at 25°C	18.7	18.4	0.728		
2	12.526	400°C reached slowly	300°C 1 atm 18 hr	No	0.95		0.64	1.40	1.37	10.877	16.5
3A	12.594	500°C reached slowly	No	No						10.564	
3B		400°C 1/2 hr	No	No	1.23		0.68	1.44	1.01	10.805	15.2
4	42.651	450°C 2 hr	350°C 1 atm 2 hr	No	3.92			0.12	0.05	35.625	17.0
5	25.315 ^d	No	350°C 1 atm 1 hr	Yes	2.20			0.23	0.05	25.320	17.6

^aHydrogen fluoride treatment as used to activate sodium fluoride.³

^bGasometric measurement with pressure of 250 mm Hg UF₆ in reactor; at 100°C unless noted otherwise.

^cRemaining on the pellet residue after evacuating reactor at 100°C; calculated from uranium analysis.

^dThis starting material is part of the pellet residue from run 4.

Magnesium fluoride:	0.631 g of "as-received" pellets
Pretreatment:	Heated at 150°C for 2 hr, with pumping to about 1 mm Hg
UF ₆ adsorption:	None detected gasometrically at 125°C to 25°C

It was concluded that the limit of detection for the gasometric system (0.1 millimole) was too large to permit the measurement of the adsorption of uranium hexafluoride on a small sample to magnesium fluoride (10 millimoles) under these conditions.

Part B: Effect of Excess Hydrogen Fluoride on Adsorption by Inadequately Pretreated Magnesium Fluoride Pellets

The conditions and observations follow:

Magnesium fluoride:	Residue from part A
Pretreatment:	Exposed to hydrogen fluoride at atmospheric pressure at room temperature; removed excess gases by pumping to less than 1 mm Hg
UF ₆ adsorption:	0.7 millimole at 25°C, by gasometric measurement
Desorption:	Heated the pellets to 320°C, resulting in evolution of 1.2 millimoles of gases which were not UF ₆ , as determined from condensation characteristics
Solid residue:	0.728 g containing 18.7 wt % total U [18.4 wt % U(VI)]

The implications are that the adsorbed uranium hexafluoride had been converted to a nonvolatile oxyfluoride by reaction with water. Also, treating magnesium fluoride that contains water with hydrogen fluoride makes the water more readily available for reaction with adsorbed uranium hexafluoride. (It will be shown in test 5 that excess hydrogen fluoride does not similarly affect adsorption of uranium hexafluoride on well-stabilized magnesium fluoride.)

Test 2: Favorable Effect of Extensive Pretreatment of Magnesium Fluoride Pellets

Conditions and observations were:

Magnesium fluoride:	12.526 g of "as-received" pellets; larger sample taken to improve gasometric sensitivity
Pretreatment:	Heated slowly to 400°C; copious quantities of gas evolved, mostly below 200°C: fluorination for 18 hr at 300°C; fluorine pressure, 1 atm
Solid residue:	10.877 g containing 1.40 wt % U [1.37 wt % U(VI)]; surface area, 16.5 m ² /g

Converting the results to a weight basis, about 14 g of uranium was retained as hexavalent uranium per 1000 g of magnesium fluoride. Another 7 g uranium per 1000 g of magnesium fluoride had been adsorbed at 200 mm Hg pressure and desorbed upon pumping down to about 1 mm Hg pressure.

Test 3: Importance of the Prefluorination Step in the Pretreatment of Magnesium Fluoride Pellets

Conditions and observations for this test are shown below.

Magnesium fluoride:	12.594 g of "as-received" pellets
Pretreatment:	Heated to 500°C slowly; 105 millimoles of gas evolved; the 105 millimoles of gas are estimated to weigh 2.03 g, assuming 52.3% of held water was converted to hydrogen fluoride; that weight agrees well with a measured weight loss of 2.03 g during pretreatment; sample was removed for that weight measurement
UF ₆ adsorption:	Reheated to 400°C for half an hour, starting part B of this test; 1.23 millimoles measured gasometrically; after removing uranium hexafluoride in gas phase from reactor by pumping, only 0.68 millimole remained, as measured by analysis of residue
Residue:	10.805 g containing 1.44 wt % total U[1.01 wt % U(VI)] surface area, 15.2 m ² /g

Only 4 g of uranium per 1000 g of magnesium fluoride was retained in a chemically reduced form when prefluorination was omitted, that quantity may be lower if the adsorption is performed in the presence of fluorine, as is done in the Volatility Pilot Plant at ORNL. This suggests that prefluorination of the magnesium fluoride may not be necessary.

Test 4: Desorption of Uranium Hexafluoride from Well-Stabilized Magnesium Fluoride

In the desorption test, the conditions and observations were:

Magnesium fluoride:	42.651 g of "as-received" pellets
Pretreatment:	Heated at 400°C for 2 hr followed by fluorination for 2 hr at 350°C under fluorine at 1 atm
UF ₆ adsorption:	3.92 millimoles by gasometric measurement; 2.25 millimoles estimated to have remained after removing uranium hexafluoride in gas phase from reactor by pumping

UF₆ desorption: The temperature was raised stepwise, holding each new temperature for half an hour

<u>Temperature (°C)</u>	<u>Cumulative Desorption (millimoles)</u>
160	0.40
220	1.36
345	2.89
420	3.28
480	>4.28

Residue: 35.625 g containing 0.12 wt % U[0.05 wt % U(VI)]; surface area, 17.0 m²/g

It is significant that, of the uranium adsorbed on well-stabilized magnesium fluoride, most of the hexavalent uranium is readily desorbed; the chemically reduced uranium remaining as a residue represents less than 1 g of uranium per 1000 g of magnesium fluoride. Assuming that uranium hexafluoride was desorbed first in this test, a temperature of less than 350°C should be adequate for removing adsorbed uranium hexafluoride down to acceptable concentrations. The volatiles desorbed in excess of the uranium hexafluoride must have been residual compounds not previously removed, for example, water.

Test 5: Lack of Effect of Hydrogen Fluoride on Well-Stabilized Magnesium Fluoride Pellets

The conditions and remarks are listed below.

Magnesium fluoride:	25.315 g or residue from previous test
Pretreatment:	Refluorination for 1 hr at 350°C under 1 atm of F ₂ ; exposing to 1 atm of HF followed by pumping off excess, all at room temperature
UF ₆ adsorption:	2.20 millimoles, measured gasometrically
UF ₆ desorption:	Residue raised to 350°C and evolved gases removed by pumping
Residue:	25.320 g containing 0.23 wt % U, [0.05 wt % U ⁶⁺] and measuring 17.6 m ² /g

No appreciable retention of uranium was noted when well-stabilized magnesium fluoride was pretreated with excess hydrogen fluoride, in contrast to the results obtained in test 2b.

DISCUSSION

The uranium adsorbed after the exposure of rigorously pretreated magnesium fluoride to uranium hexafluoride at 100°C is largely hexavalent and can be removed by heating or pumping (see tests 2, 3, 4, and 5 in Table 1); therefore, the adsorbed uranium must be present as the hexafluoride, either adsorbed physically or in the form of a complex. Physical adsorption is the most probable mechanism, since the maximum quantity of uranium held is insufficient to yield a reasonable complex with the magnesium fluoride. Significantly, at 350°C, less than 1 g of the uranium per 1000 g of magnesium fluoride remains adsorbed.

The drastic loss of surface area of the magnesium fluoride pellets (down to 15.2 to 17.6 m²/g for the pellets in tests 2, 3, 4, and 5) represents primarily the cumulative sintering effects of exposure to heat. The quantities of uranium hexafluoride adsorbed or recovered in these tests and in ORNL pilot plant run R-8 and at Paducah³ are in sufficiently good agreement to indicate that the magnesium fluoride in the larger-scale operations also undergo surface area reductions.

Some of the volatile material associated with the pellets remains trapped even after heating them to over 400°C and after extensive fluorine treatment at 300°C (see test 4). The occluded volatile material, presumably a mixture of hydrogen fluoride and water, must be unavailable to the uranium hexafluoride since otherwise the water would react with the hexafluoride and prevent subsequent desorption of the uranium.

Little uranium in a reduced valence state was found on the magnesium fluoride residues except where prefluorination had been omitted; in each case (tests 1 and 3) about 0.3 to 0.4% quadrivalent uranium was present. This reduction may be accounted for by an equivalent fluorination of the nickel reactor or the tray upon which the pellets rested.

CONCLUSIONS AND RECOMMENDATIONS

Physical adsorption is responsible for most of the uranium adsorbed on well-stabilized magnesium fluoride pellets, and the uranium hexafluoride can be removed down to less than 1 g of uranium per 1000 g of magnesium fluoride by heating to 350°C. These two facts lead to two schemes for the release of the physically adsorbed uranium hexafluoride and its separation from technetium hexafluoride and provide a means of economically discarding used magnesium fluoride pellets.

The first scheme, which appears simplest to try and put into pilot-plant practice, is to heat the loaded pellet bed to about 350°C in order to preferentially release the uranium hexafluoride. According to the data of Gollither and co-workers,² the technetium compound is poorly desorbed (18% at 1000°F in nitrogen).

The alternative scheme is to release both the uranium and technetium hexafluorides from the loaded pellet bed by heating to 500°C in fluorine and then to selectively adsorb the uranium hexafluoride on sodium fluoride at 100°C; Golliher and co-workers² found that only 4% of the technetium that passed through a sodium fluoride trap at 200°F was retained.

Simplifying the pretreatment of the magnesium fluoride pellets might be considered also. A more rigorous preheating treatment may permit omission of the fluorination step.

REFERENCES

1. Chemical Technology Division, Annual Progress Report, Period Ending May 31, 1963, ORNL-3452, p 26-50 (Sept. 20, 1963).
2. W. R. Golliher, R. A. LeDoux, S. Bernstein, and V. A. Smith, Separation of Technetium-99 from Uranium Hexafluoride, TID-18290 (1960).
3. S. Katz, A Gasometric Study of Solid-Gas Reactions, Sodium Fluoride with Hydrogen Fluoride and Uranium Hexafluoride, ORNL-3497 (Oct. 15, 1963).



ORNL-3544
 UC-4 - Chemistry
 TID-4500 (25th ed.)

INTERNAL DISTRIBUTION

- | | |
|-------------------------------------|--------------------------------|
| 1. Biology Library | 51-52. Sidney Katz |
| 2-4. Central Research Library | 53. L. J. King |
| 5. Reactor Division Library | 54. C. E. Larson |
| 6-7. ORNL - Y-12 Technical Library | 55. R. B. Lindauer |
| Document Reference Section | 56. M. J. Skinner |
| 8-42. Laboratory Records Department | 57. S. H. Smiley (K-25) |
| 43. Laboratory Records, ORNL R.C. | 58. J. A. Swartout |
| 44. R. E. Blanco | 59. A. M. Weinberg |
| 45. G. E. Boyd | 60. M. E. Whatley |
| 46. J. C. Bresee | 61. P. H. Emmett (consultant) |
| 47. W. H. Carr | 62. J. J. Katz (consultant) |
| 48. F. L. Culler | 63. T. H. Pigford (consultant) |
| 49. C. E. Guthrie | 64. C. E. Winters (consultant) |
| 50. H. L. Hemphill | |

EXTERNAL DISTRIBUTION

65. E. L. Anderson, Atomic Energy Commission, Washington, D.C.
66. H. Schneider, Atomic Energy Commission, Washington, D.C.
67. H. M. Roth, Atomic Energy Commission, ORO
68. L. P. Hatch, Brookhaven National Laboratory
69. G. Strickland, Brookhaven National Laboratory
70. O. E. Dwyer, Brookhaven National Laboratory
71. R. H. Wiswall, Brookhaven National Laboratory
72. R. C. Vogel, Argonne National Laboratory
73. A. Jonke, Argonne National Laboratory
74. J. Fischer, Argonne National Laboratory
75. J. Schmets, CEN, Belgium
76. Research and Development Division, AEC, ORO
- 77-665. Given distribution as shown in TID-4500 (25th ed.) under Chemistry category (75 copies - OTS)

